

Model 3520

265 W max out • 230 VAC input

- Fixed output voltages
- High efficiency and low standby power (ErP Directive)
- Fixed mains cable, 2-pin IEC 60320 available
- Short circuit proof, thermal protection
- Mounting bracket included
- ECO-design compliance:
 - CoC Tier 2, DoE level VI, CEC, MEPS
- Approvals:
 - Home healthcare EN 60601-1-11 (fixed cord vers. only)
 - Medically certified
 - Safety: EN 60601-1 ed. 3.1
 - EMC: EN 60601-1-2 ed. 4
 - UL approved
- Custom specifications on request:

Output voltage, connectors, cords, logo print, housing/open frame/IP rating and certificates. For more information: [custom design info sheet](#)

Notes:

Desktop
230V
Switch mode
2-pin IEC 60320, fixed mains cable available
Mounting bracket included



Available versions

12V / 17A

16V / 16A

24V / 10A


48V / 5A

| SPECIFICATIONS MASCOT TYPE 3520 | 5V | 12V | 16V | 24V | 48V |
|--|---|--|--------------------------------|--------------------------------|--------------------------------|
| Input voltage: | 198 - 264V AC 260 - 340V DC | 198 - 264V AC 260 - 340V DC | 198 - 264V AC 260 - 340V DC | 198 - 264V AC 260 - 340V DC | 198 - 264V AC 260 - 340V DC |
| Line frequency: | 47 - 50Hz | 47 - 50Hz | 47 - 50Hz | 47 - 50Hz | 47 - 50Hz |
| Output voltage, nominal: | 5V | 12.5V | 16V | 24V | 48V |
| Output voltage, adjustable: | 5 - 6.5V | 12 - 13.2V | 15.5 - 18V | 22 - 26V | 46 - 50V |
| Max. output current: | 20A | 17A continuous. 20A intermittent | 16A | 10A | 5.2A |
| Min. output current: | 0A | 0A | 0A | 0A | 0A |
| Max. output power: | 140W | 213W continuous. 265W intermittent. | 260W | 265W | 250W |
| Load regulation (0 - 100% load): (Measured on PCB) | <1.5% | < 0.5% | < 0.3% | < 0.3% | <0.3% |
| Mains regulation: (Mains variation: 198 - 264V AC, 100% load) | <0.1% | < 0.1% | < 0.1% | < 0.1% | <0.1% |
| Ripple: | < 20mV p-p | < 20mV p-p | < 20mV p-p | < 20mV p-p | < 20mV p-p |
| Efficiency (at 100% load) approx.: (Measured on PCB) | 88% | 92% | 93% | 93% | 92% |
| Switch frequency approx.: | 65kHz | 65kHz | 65kHz | 65kHz | 65kHz |
| Overshoot (90 - 10% load variation): (Measured on PCB) | < 300mV | < 300mV | < 300mV | < 300mV | < 300mV |
| Undershoot (10 - 90% load variation): (Measured on PCB) | < 300mV | < 300mV | < 300mV | < 300mV | < 200mV |
| Current limitation at approx.: | 22A | 22A | 17A | 11A | 5.5A |
| Input surge current limitation: | < 30A | < 30A | < 30A | < 30A | < 30A |
| Hold up time: | > 20ms | > 20ms | > 20ms | > 20ms | > 20ms |
| Protection: | Short circuit proof. Thermal protection | | | | |
| Temperature range: | Operating: -20 - +40 °C / With derating: +60 °C / Storage: -25 - +85 °C | | | | |
| Derating: | 6.5W/°C over 40°C | | | | |
| Safety: | EN60601-1 | | | | |
| Insulation class: | Class II | | | | |
| Insulation voltage: Primary - secondary: | 4000V AC / 5700V DC | | | | |
| EMC standards: | EN 60601-1-2: 2015 (Edition 4) | | | | |
| Efficiency level: | ErP / VI (for DoE & CEC) | | | | |
| IP grade: | With 2 pin IEC 60320: IP41. With mains cable: IP44. | | | | |
| Indication: | Blue LED indicator | | | | |
| Input terminal: | 2 pin IEC60320 or mains cable | | | | |
| Output terminals: | Secondary cable with open ends. | | | | |
| Dimensions: | 210 × 113 × 53mm | | | | |
| Weight: | 1400g | | | | |

Standard output cordsets

| Versions | Part no. | Type | AWG | Length (M) | Notes |
|------------------------|----------|-----------|--------|------------|--------------|
| 12V * 16V 24V * 48V | 205809 | Open ends | 2 x 13 | 1.1 | PVC, UL 1185 |

Technical drawing

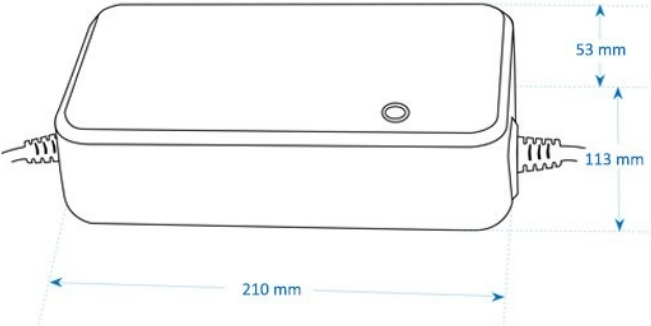


EU & UK Declaration of Conformity



We, the responsible manufacturer;

Company Name: **Mascot Electronics AS**
Postal Address: **P.O.Box 177, N-1601 Fredrikstad, NORWAY**
Visiting Address: **Mosseveien 109, N-1624 Gressvik, NORWAY**
Telephone: **(+47) 69 36 43 00** E-mail: **sales@mascot.com** WEB: **www.mascot.com**

declare that this Declaration is issued under our sole responsibility and belongs to the following product(s):

Product and intended purpose: **Power Supply Unit**
Brand(s): **and/or  (may also carry additional customer name, logo or trade mark)**
Type(s)/Model(s)/UDI-DI: **3520**
(may also carry additional customer model name or part number)
Batch / Serial No./UDI-PI: **all CE- and/or UKCA- marked products produced from the date indicated below**
(for production date: see marking on the product)
Description: **Input: max. 2.4 A, 220 - 240 VAC, 50 Hz**
Output: 4 - 60 VDC, max. 17A cont., max. 20 A intermittent, max. 294 W
or
Input: max. 4.3 A, 110 - 120 VAC, 60 Hz
Output: 4 - 60 VDC, max. 17A cont., max. 20 A intermittent, max. 252 W

The product(s) described above are in conformity with the relevant European Union harmonisation legislation for CE-marking:

| | |
|-------------|--|
| 2014/35/EU | EU Directive - Safety of electrical equipment ("Low-Voltage Directive") (LVD) recast, repealing Directives 2006/95/EC & 73/23/EEC |
| 2014/30/EU | EU Directive - Electromagnetic Compatibility (EMC) recast, repealing Directives 2004/108/EC & 89/336/EEC |
| 93/42/EEC | EU Directive - General Medical Devices (MDD), Risk Class I Device will from 26.05.2021 be repealed by "MDR" Regulation (EU) 2017/745 |
| 2009/125/EC | EU Directive - Energy Related Products, Ecodesign (ERP) recast, repealing Directive 2005/32/EC (EUP) |
| 2015/863/EU | EU Directive - Restriction on use of Hazardous Substances in EEE ("RoHS3") recast, repealing Directives 2002/95/EC, 2008/35/EC & 2011/65/EU |

The product(s) described above are in conformity with the relevant U.K. legislation for UKCA-marking:

Electrical Equipment (Safety) Regulations 2016
Electromagnetic Compatibility (EMC) Regulations 2016
The Medical Devices (Amendment etc.) (EU Exit) Regulations 2020, Risk Class I Device
Ecodesign for Energy-Related Products (External Power Supplies) Regulations 2020
Draft Regulation, awaiting implementation
The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

The following harmonised standards and technical specifications have been applied:

(International editions and comments indicated in brackets):

Electrical Safety (to MDR/MDD-Directives):

| | | |
|---------------|---|---|
| EN 60601-1 | EN 60601-1:2006 + /AC:2010 +/A1:2013 (IEC 60601-1:2005 + /A1:2012) | Medical electrical equipment, Edition 3.1 |
| EN 60601-1-11 | EN 60601-1-11:2010 Medical electrical equipment and systems used in the home healthcare environment, Edition 1.0 (IEC 60601-1-11:2010 +/COR1:2011, Ed.1.0) (also IEC 60601-1-11:2015 +/A1:2020, Ed.2.1, but not yet an EN-norm) NOTE: for products rated IPx1 or higher to standard EN 60529 only | |

Electromagnetic Compatibility (to MDR/MDD-Directives):

| | | |
|--------------|--|--|
| EN 60601-1-2 | EN 60601-1-2:2015 (IEC 60601-1-2:2014, Edition 4.0) | Medical equipment, EMC - Requirements and tests, Edition 4.0 |
|--------------|--|--|

Electromagnetic Compatibility (to EMC-Directive):

| | | |
|--------------|---|---|
| EN 61000-6-1 | EN 61000-6-1:2007 (IEC 61000-6-1:2005, Edition 2.0) (also IEC 61000-6-1:2016, Edition 3.0, not yet an EN-norm) | Immunity-residential, comm. & light-industrial environment, Edition 2.0 |
| EN 61000-6-3 | EN 61000-6-3:2007 + /A1:2011 & /AC:2012 (IEC 61000-6-3:2007 + /A1:2010) | Emission-residential, comm. & light-industrial environment, Edition 2.1 |

Ecodesign to EU ERP-Directive:

| | |
|---|--|
| Commission Regulation (EC) No 2019/1782 | implementing Directive 2005/32/EC with regard to ecodesign requirements for no-load condition electric power consumption and average active efficiency of external power supplies (Repealing Commission Regulation (EC) No 2019/1782 from 2020-04-01) (Note: not applicable to Battery Chargers, ref. Article 1.2 item c) |
|---|--|

Ecodesign for U.K.:

| | |
|---|---|
| Draft Regulation only (awaiting implementation) | Draft "Ecodesign for Energy-Related Products (External Power Supplies) Regulations 2020" (Note: not applicable to Battery Chargers) |
|---|---|

Ecodesign for U.S.A. (Note: depends on battery used !):

| | |
|---|---|
| US Code of Federal Regulations (CFR) Also called "DoE compliance" | 10 CFR Part 430 - Energy Conservation Program for Consumer Products, 10 CFR Part 430, Subpart B - Test Procedures, 10 CFR Appendix Y to Subpart B of Part 430, Uniform Test Method for Measuring the Energy Consumption of Battery Chargers or 10 CFR Appendix Z to Subpart B of Part 430, Uniform Test Method for Measuring the Energy Consumption of External Power Supplies, whichever applicable. |
| California Code of Regulations (CCR) Also called "CEC-400 compliance" referring to CEC-400-2017-002 "2016 Appliance Efficiency Regulations" issued by California Energy Commission | CCR Title 20 - Public Utilities and Energy, Division 2 - State Energy Resources Conservation and Development Commission, Chapter 4 - Energy Conservation, Article 4 - Appliance Efficiency Regulations, Sections 1601 to 1609 |

Restriction of the Use of certain Hazardous Substances (RoHS) for EU:

| | |
|---------------------|--|
| 2015/863/EU "RoHS3" | EU Directive - Restriction on use of Hazardous Substances in EEE Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment |
|---------------------|--|

Restriction of the Use of certain Hazardous Substances for UK:

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

Additional Information:

Compliance with harmonised standards and technical specifications may have been verified by the manufacturer, by third party testing or by a Certification Body (NCB).

The products are considered Risk Class I devices according to EU Medical Devices Directive, EU Medical Devices Regulation and the U.K. Medical Devices (Amendment etc.) (EU Exit) Regulations 2020.

The product(s) may be produced at production sites (for specific product: see "Made in"-marking on the product):

- Mascot Baltic OÜ, Taevakivi 15, EE-13619 Tallinn, ESTONIA
- Mascot Power Supplies (Ningbo) Co.,Ltd, No.128 Jinchuan Road, Zhenhai, Ningbo 315221, CHINA

The production sites are certified to standard EN 29001:2015 (ISO 9001:2015) by:

- Mascot Baltic OÜ: Metrosert, certificate ref. K-144
- Mascot Power Supplies (Ningbo) Co.,Ltd: DNV-GL, certificate ref. 179027-2015

The most recent issue of this Declaration is available at www.mascot.com.

Fredrikstad, Norway

Place of issue

2021-03-02

Date of issue

Signed on behalf of Mascot Electronics AS



Finn-Erik Waalin, Compliance Manager

Name, function, signature